



Sorrento BariatricTM

Instruction Manual


This Instruction Manual is frequently updated to ensure safe use of your chair.
Visit seatingmatters.com where you can find a free copy of the most up to date version.



Contents

2	Technical Specification
5	Operating Instructions
5	Back Angle Adjustment
6	Tilt in Space
7	Leg Elevation
8	Footplate Height
9	Footplate Angle
10	Seat Width Adjustment
11	Arm Removal
12	Arm Height Adjustment
13	Negative Angle Leg Rest
14	Seat Depth Adjustment
15	Further Seat Depth Adjustment
16	Lower Waterfall Back Cushion Removal
17	Seat Cushion
18	Chair Movement
19	Charging Your Chair
21	Cleaning Instructions
22	Safety Instructions
23	Maintenance & Servicing
24	Recycling Policy
25	Warranty
26	Intellectual Property

Sorrento™ Bariatric

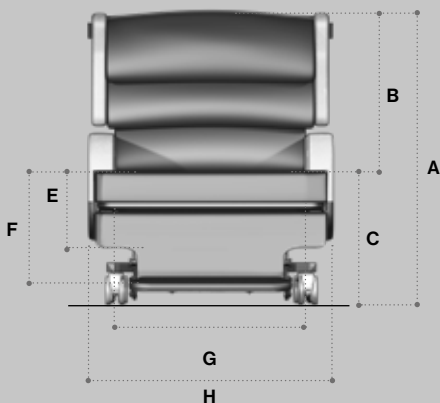

Basic Dimensions

A	Overall Height	1300mm / 51.5"
B	Back Height	700mm / 28" (Low) 750mm / 30" (Medium) 800mm / 32" (High)
C	Seat Height	580mm / 23"
D	Overall Length	1480mm / 58.5"

*Height measurements are based on 125mm castors.

Seat to Footplate Height Adjustments

E	High	360mm / 14" from seat
F	Low	470mm / 18.5" from seat

Available Seat and Overall Widths

G (Seat Width)	H (Overall Width)
850mm / 34"	1070mm / 42"
900mm / 36"	1120mm / 44"
950mm / 38"	1170mm / 46"
1000mm / 40"	1220mm / 48"

Arm Height Options

I	Low	140mm / 5.5"
J	Medium	165mm / 6.5"
K	High	180mm / 7.5"

Seat Depth

L	520mm - 430mm / 20.5" - 17"
---	-----------------------------

Lower waterfall back cushion can also be removed.

Clearance Height

M	140mm / 6"
---	------------

*Height measurements are based on 125mm castors.

Recline and Tilt Angles

ii Back Angle Recline

90° - 130°
40° range

iii Leg Rest Angle

80° - 128°
48° range

iv Tilt in Space



From 5° forward,
or anterior, tilt to 30° backward tilt.

Chair Weight Unloaded

20st / 130kg / 286lb

Patient Weight Limit

71st / 453kg / 1000lb

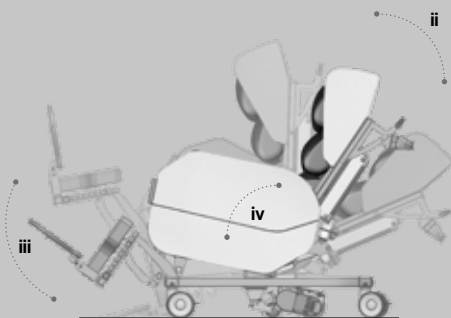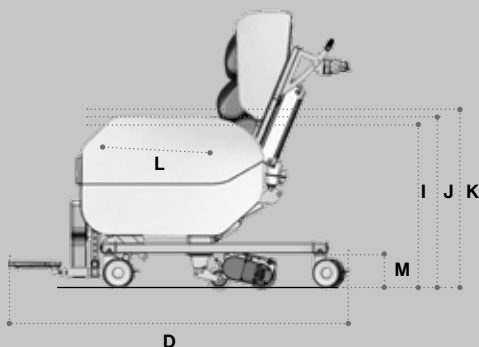

Terminologies

Patient

The person sitting in the chair.

User

Competent person with responsibility for the persons sitting in the chair as well as the suitability of the equipment for the Patient. The User is responsible for checking the chair for faults during the course of its use.

All instructions must be read and understood before the chair may be used.

Back Angle Adjustment

To recline the back of the chair (fig.1).

Use the buttons on the handset to move the back of the chair slowly until it is in the required position.

- i. To sitting position (fig.1a).
- ii. To reclined position (fig.1b).



(fig.1)



(fig.1a)

(fig.1b)

Tilt in Space

To adjust the tilt angle of the chair (fig.2).

Use the buttons on the handset to move the tilt angle of the chair slowly until it is in the required position.

- i. To sitting position (fig.2a).
- ii. To reclined position (fig.2b).



(fig.2)



Leg Elevation

To adjust the angle of the leg rest (fig.3).

Use the buttons on the handset to move the leg rest of the chair slowly until it is in the required position.

- i. Leg rest to elevated position (fig.3a).
- ii. Leg rest to sitting position (fig.3b).



(fig.3)



Footplate Height


To adjust the seat to footplate height of the chair (fig.4).

From the front of the chair, and with both hands, locate the two spring plungers at either side of the calfpad (fig.4a). Pull both spring plungers outward at the same time and move the footplate to the required position before releasing.


The pin of the spring plunger will locate to the nearest hole position and lock into place (fig.4b).



(fig.4)

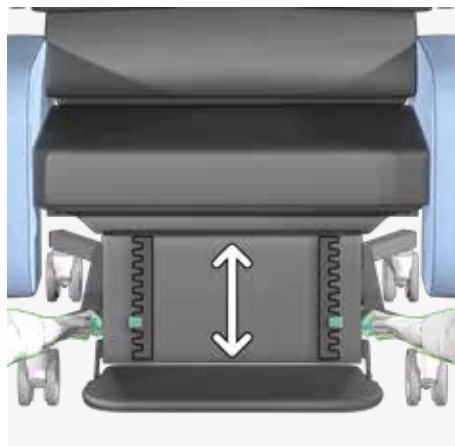

(fig.4a)

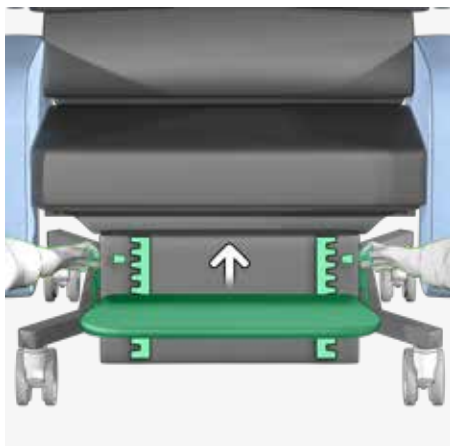


(fig.4b)

Footplate Angle


To adjust the angle of the footplate (fig.5).

Using a 4mm allen key and 10mm spanner, loosen and remove the fixing bolt at either side of the footplate pivot (fig.5a).


Relocate both bolts to the required setting (fig.5b) and tighten securely.

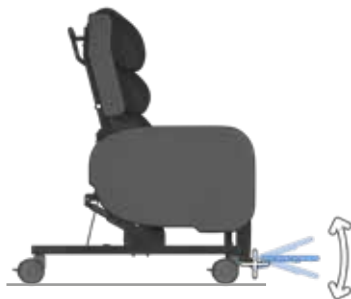

(fig.5)

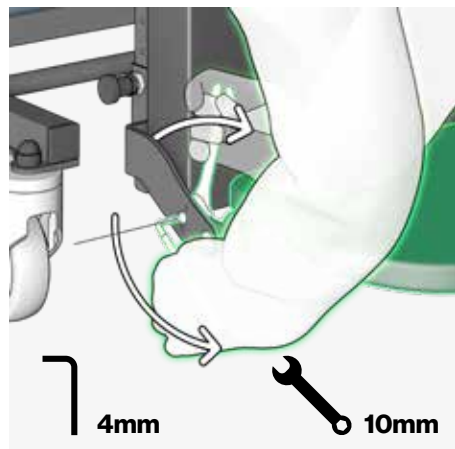

(fig.5a)

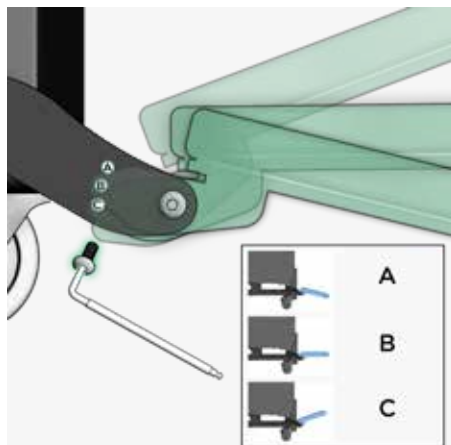


(fig.5b)

Seat Width Adjustment

To increase or decrease the seat width of the chair (fig.6).


From the front of the chair, find the blue thumb screws on each side of the chair by reaching under the arm and locating them (fig.6a). Loosen these slightly. From the back of the chair locate the blue wing knobs on the left and right of the seat frame, loosening them slightly. (fig.6b) Reposition the arms to the required position and tighten securely.



(fig.6)



(fig.6a)

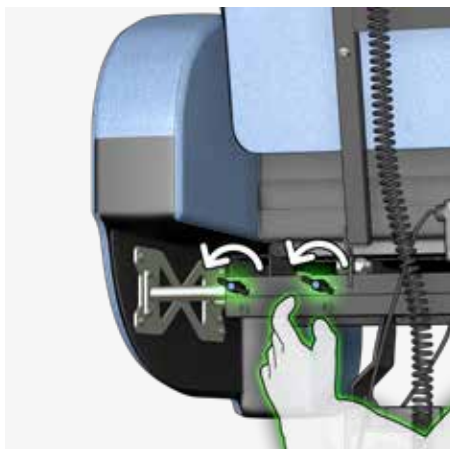


(fig.6b)

Arm Removal

To remove the arms of the chair (fig.7).


From the front of the chair, reach under the arm of the chair and locate the blue thumb screws on the same side as the arm you will be removing (fig.7a). Loosen these slightly. From the back of the chair locate the blue wing knobs on the side of the arm you want to remove (fig.7a). Loosen these wing knobs slightly. With the arm now free, remove it and set it in a safe place. (fig.7b) Tighten the adjustment knobs to resecure the arm.



(fig.7)



(fig.7a)

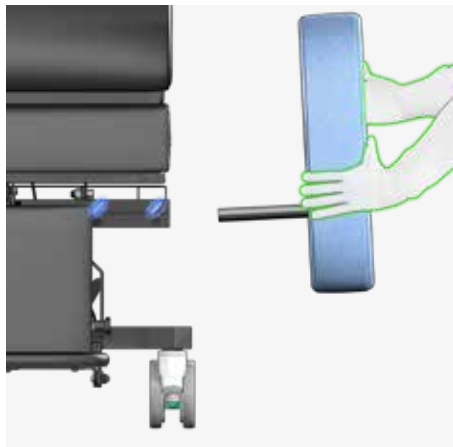

(fig.7b)

Arm Height Adjustment

To adjust the arm height of the chair (fig.8)


From the front of the chair, reach under the arm of the chair and locate the blue thumb screws on the same side as the arm you will be adjusting (fig.8a). Remove and relocate these thumb screws. From the back of the chair locate the blue wing knobs on the side of the arm you want to adjust (fig.8a). Remove and relocate these wing knobs. With the arm now free, remove it and reposition it to the required height (fig.8b). Tighten the adjustment knobs to resecure the arm.



(fig.8)



(fig.8a)

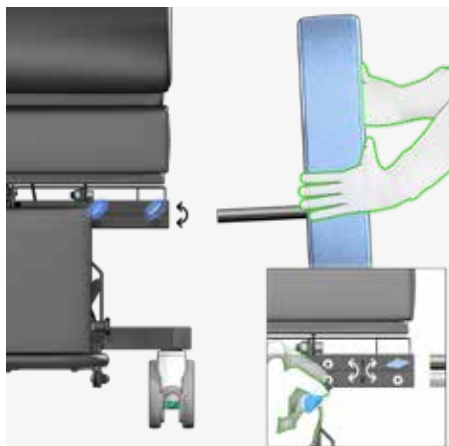

(fig.8b)

Negative Angle Leg Rest


The closed angle of the leg rest can be adjusted inwardly to achieve a negative angle (fig.9). Some tools are required to carry out this adjustment (fig.9a).

Remove the chair arms for ease of access (see page 11).


With two 13mm spanners, loosen and remove the fixing bolts on each side of the leg rest (fig.9a). Relocate the fixing bolts to the required setting (fig.9b) and tighten securely.



(fig.9)

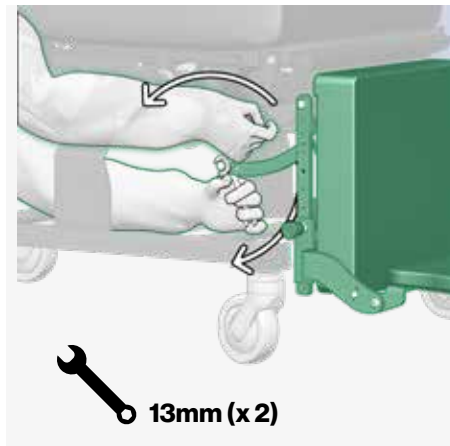

(fig.9a)

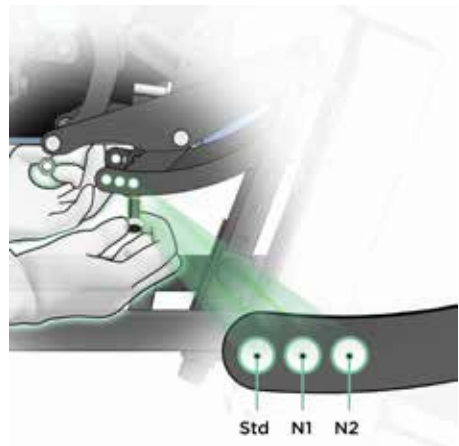

(fig.9b)

Std (Standard setting)	N1	N2
90°	75°	60°

Seat Depth Adjustment

To adjust the seat depth of the chair (fig.10).

From the front of the chair, reach under the seat base and locate the yellow thumb screws on the right and left hand side of the calf pad. Loosen these thumb screws by turning them anti-clockwise (fig.10a). With both hands placed on the calf pad, reposition the seat depth by pulling forward or pushing back the calf pad until it is in the required position (fig.10b). To lock the seat depth in the new position, tighten the yellow thumb screws by turning them clockwise.



(fig.10)



(fig.10a)



(fig.10b)

***These adjustments should only be made by a Seating Matters approved provider.**

Further Seat Depth Adjustment

For further seat depth adjustment, the back frame position can be moved (fig.11). Some tools are required to carry out this adjustment (fig.11a).*

Remove the chair arms for ease of access (see page 11).


From the back of the chair, with a 10mm allen key inserted to the allen key bolt, and a 17mm spanner fixed to the M10 nut (fig.11a), loosen the back fixing point by turning the bolt anti-clockwise. Remove both back fixing bolts and re-insert them in the desired position (fig.11b). Tighten both bolts so the back is secure without any sideways movement.



(fig.11)



(fig.11a)

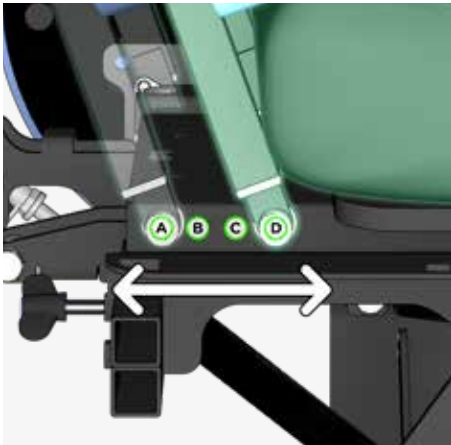

(fig.11b)

There are 4 options for seat depth.

A 610-580mm	B 590-560mm	C 570-540mm	D 550-530mm
24-22.5"	23-22"	22.5-21"	22-20.5"

For the longest seat depth, remove the lower waterfall back cushion. See page 16 for instructions.


Lower Waterfall Back Cushion Removal

To remove the lower waterfall back cushion on the Bariatric Sorrento™ (fig.12)

From the front of the chair, unbutton the lower waterfall back cushion (fig.12a) and remove it to increase the seat depth for patients with a pronounced gluteal shelf (fig.12b).



(fig.12)

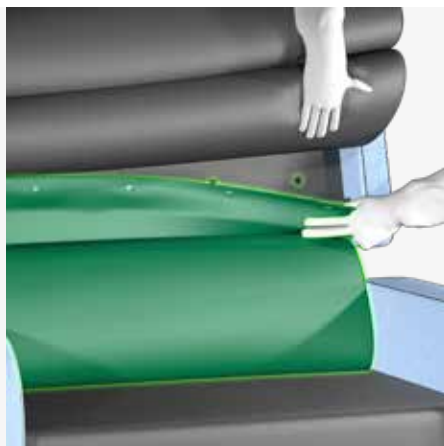

(fig.12a)



(fig.12b)

Seat Cushion

Removal and fitting of the modular Seating Matters cushion (fig.13).

The underside of the Seating Matters cushion and the baseboard of the chair are upholstered with non-slip material, which combine to create a friction contact when the chair is occupied. To fit the cushion correctly, place the cushion onto the baseboard of the chair, with the non-slip underside of the cushion facing downwards (fig.13a). The rear, zipped end of the cushion should be facing towards the back of the chair (fig.13b). See cushion label for orientation. To remove the cushion, simply lift it out from the chair.



(fig.13)



(fig.13a)



(fig.13b)

Correct fitment of the Seating Matters cushion is important as the structure of the foam allows good immersion **ONLY** when fitted as instructed above.

Chair Movement

Directional Lock Castor


For control of direction and manoeuvrability while pushing the chair (fig.14c).

The directional lock castor is located on the front left side of the chair (fig.14).


To engage the directional lock castor simply press the green pedal with your foot (fig.14a) and swivel the castor until it clicks into the forward line (fig.14b).




(fig.14)

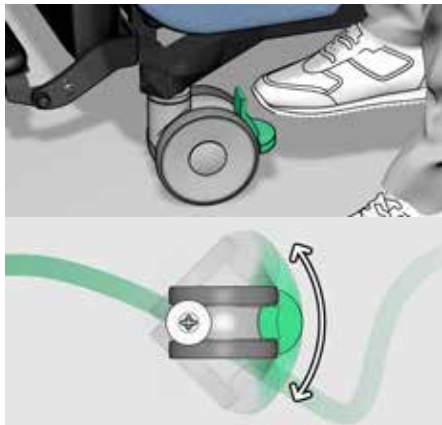

(fig.14a) Directional lock disengaged.

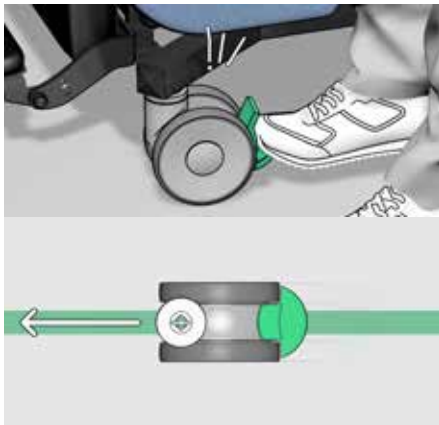

(fig.14b) Directional lock engaged.

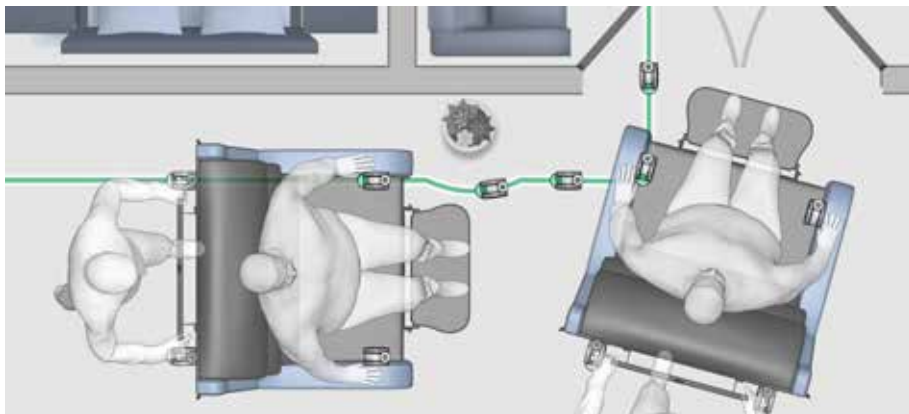

(fig.14c) Image showing use of the directional lock to improve manoeuvrability.

Braking Castors


To lock the chair in position (fig.15c).

Both rear castors on the chair are total lock castors (fig.15). When engaged, the swivel and rotation of the castor will be locked.

To engage the braking castor simply press the pedal with your foot until it clicks in place (fig.15b).




(fig.15)

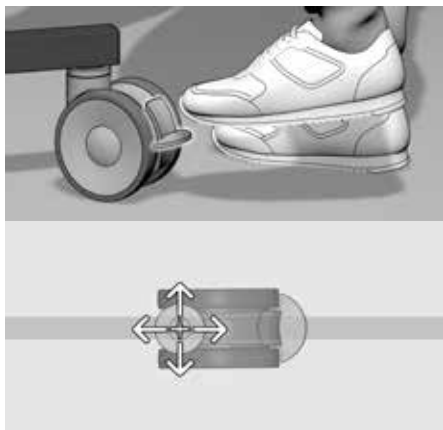

(fig.15a) All locks disengaged.



(fig.15b) Braking castors engaged.

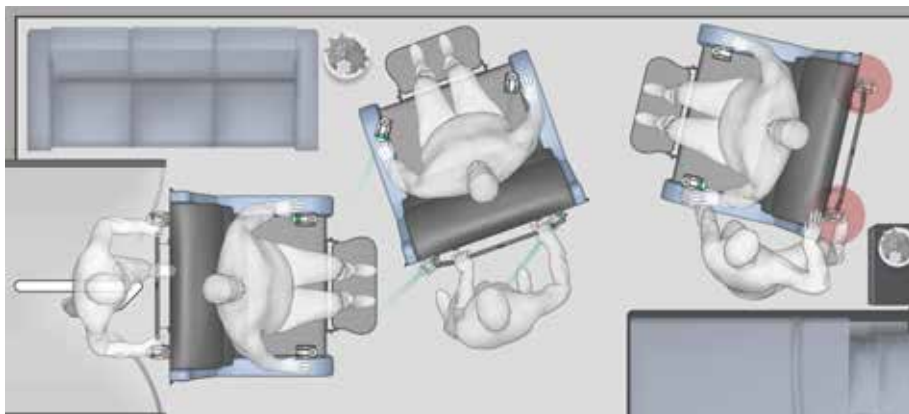

(fig.15c) Image showing chair in locked position.

Charging Your Chair


For motorised models only.

Your chair will arrive fully charged.

It is recommended to charge your chair daily to maintain battery health.

Charger Assembly

The charger is made up of two parts which require assembly prior to charging, the charger body and charger adapter. Simply slide the relevant charger adapter into the charger body ensuring it has clicked into its secure position (fig.16a).

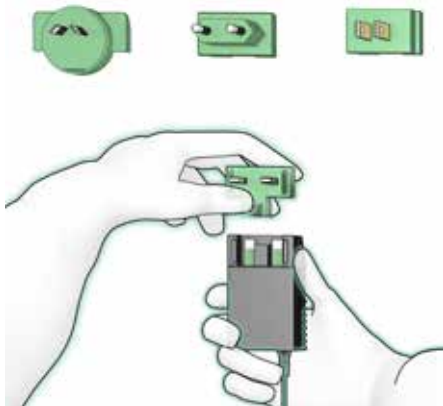

(fig.16a)



(fig.16b)

To charge your chair, plug the charger into a wall socket and plug the connector end into the charging socket on the left side of the handset (fig.16b).

Monitor your chair's charging status using the status light (fig.16d).



(fig.16c)



(fig.16d)

Cleaning Instructions



Your Seating Matters chair is upholstered with two distinct materials, Vinyl and Dartex multi-stretch material. See image above for how to identify these on your chair.

Properties

Vinyl

Vinyl is resistant to urine, most household stains, mild acids/alkalis, drinks and beverages as they are not absorbed and can be wiped off without any problem or lasting damage. Some difficult substances such as lipstick, ball point pen ink and food colourings should be cleaned off immediately to avoid permanent staining.

Dartex Multi-stretch Fabric

Dartex is waterproof, has the ability to be wiped clean and has biostatic (anti-mycotic) coatings to provide an impenetrable barrier to virus and bacteria.

Cleaning

Superficial dirt may be removed by wiping with a soft cloth moistened with water containing a neutral detergent. More persistent contamination may be treated by wiping with alcohols or turpentine substitute, followed by hot water and detergent. Routine cleaning and disinfection may be carried out on the coating with hand hot water and a neutral detergent or with a bleach solution (0.1% or 1000 parts per million available chlorine). The material is compatible with the 10,000ppm available chlorine in solution required for the decontamination of blood spills. Excess solution must be removed and the surface thoroughly rinsed and dried prior to reuse or storage. Proprietary disinfectants may be used provided manufacturer's instructions are followed. All cleaning agents, and disinfectants, must be thoroughly rinsed off and the item dried after cleaning.

What you can use:

1. Warm Soapy Water	Use warm soapy water to wash down your chair. Bear in mind that it is important to dry the surface afterwards.
2. 70% Alcohol	This can be used in line with the manufacturer's guidelines.
3. Bleach	Concentrations of bleach from 1,000ppm to 10,000ppm available chlorine, is likely to be considered effective cleaning. Use bleach sparingly.

Example of Dilution Ratio

The ppm of available chlorine may vary with each different brand of bleach. Search online for its data sheet and adjust your ratio accordingly to achieve a dilution of approx. 1000ppm of available chlorine.



Water



Bleach

For an in-depth guide to cleaning, please consult our Clinicians Guide to Infection Control, available on our website.



Safety Instructions

Assembly, Installation, Warnings & Hazards

- ① A competent person, or User, trained in the use of the chair, who is either a suitably qualified medical professional, or is working under their guidance and instruction, should make adjustments and set up the chair according to the Patient requirements and dimensions before the Patient sits in the chair. Where possible, adjustments should be made when the Patient is not in the chair to avoid injury to the User and Patient.
- ② This chair, and its accessories, should be used in accordance with local or regional guidelines regarding the use of such medical devices.
- ③ This chair should be fully assembled, all fixings secured and the chair checked for safety by a competent person before use.
- ④ The User must ensure that the chair is in good condition before use (check all nuts and bolts are fastened, fabric in good condition etc). If there are any problems, these must be reported to your Seating Matters provider and corrected before the chair is put into use.
- ⑤ Keep all body parts away from the mechanisms under the chair. Repairs and maintenance should only be carried out by fully trained technicians.
- ⑥ Exercise care in using the release lever for the reclining mechanisms and adjustments to avoid injury.
- ⑦ Pressure ulcer or pressure injury reduction is not a guarantee with this equipment. The User must ensure that the Patient has a period out of the chair after prolonged sitting to raise tissue oxygenation levels. Although the chair offers pressure management, the body tissue still needs time to recover. In many places, local or national guidelines recommend a maximum of 2 hours sitting at any one time. You must also observe Patient specific recommendations and guidelines as set by their health professional with regard to the use of tilt and recline for appropriate pressure management.
- ⑧ The chair must be used on a level, plain, hard surface with the brakes engaged to avoid it moving during use and to ensure stability. When the chair is not in transit, all the braking castors on the product must be engaged to prevent risk of injury when being used.
- ⑨ The chair may not be left in an outdoor environment. More information on fabrics and their environment can be found later in this manual.
- ⑩ Ensure there is more than one competent person there when making adjustments to ensure they are correct and safe for the Patient.
- ⑪ If in doubt as to any the adjustments, feel free to contact Seating Matters direct at technical@seatingmatters.com.
- ⑫ Under no circumstances must the User or Patient stand or sit on the footplate of the chair.
- ⑬ The chair should not be transported in a vehicle while the Patient is seated on the chair.
- ⑭ This chair should not be lifted at any time unless by competent persons trained in such manual handling.
- ⑮ When operating the leg rest and recline features on the chair please ensure there is a 450mm / 18" gap around the chair to prevent the back or leg rest coming into contact with a wall or any other object.
- ⑯ On powered options, please ensure that your chair is charged daily.

Please call your Seating Matters provider if you have any questions on these points.

Maintenance & Servicing

Regularly servicing your Seating Matters chair will prevent untimely and inconvenient breakdowns, reduce repair costs and extend the chair's working life. Damage to the chair can also cause excess strain for the User and Patient.

Important

Parts can only be changed by service persons trained in Seating Matters products and use only Seating Matters parts. We recommend that your chair is serviced every year by a Seating Matters approved provider for any running repairs and maintenance.

Maintenance

Carry out the following regular checks to ensure the operation and safety of the chair. If you are in any doubt about the functioning of your chair contact your Seating Matters approved provider immediately.

Daily

- 1 Check that the castors are not damaged.
- 2 Check that the castors turn freely.
- 3 Make sure that the castor forks run free and are not bent.
- 4 Check all fabrics for damage or contamination and replace where necessary.
- 5 See Cleaning Instructions section in the manual for cleaning instructions.
- 6 Check batteries and electrical connections are secure.

Weekly

- 1 Check the castor fittings for hair and dirt etc. which could restrict the castor movement.
- 2 Pick out any such material with tweezers or take the spindle out, clean it and then replace it.
- 3 If it is still not free (one continuous turn without it sticking) contact your Seating Matters approved provider for a replacement.

Monthly

Castors

Make sure the top of the castor housing is parallel with the floor. Any variation will cause restricted movement. If it is damaged contact your Seating Matters approved provider for a replacement.

Mechanisms

Check all tilting mechanisms are working smoothly.

Check that cables are not kinked or frayed.

Check that all nuts and bolts are present.

Check that all nuts and bolts are secure.

Note: If nuts or bolts need attention, contact your Seating Matters approved provider IMMEDIATELY and DO NOT USE the chair until it has been serviced.

Leg Rest

Check that all leg rests are easily removed/swung-away and replaced or repositioned easily. Ensure that parts lock in place securely. If parts are not locking try lubricating. If the problem still remains contact your Seating Matters approved provider.

Frame

Check the visible parts of the frame for cracks, splits, large dents or other damage. If you find any of these things DO NOT USE. Contact your Seating Matters approved provider immediately.

Recycling Policy

Seating Matters are committed to reducing waste and improving our care for the environment. Where possible we have manufactured our chairs with recyclable materials. Guidance on recycling can be found below.

The WEEE Directive

The WEEE Directive, 2012/19/EC, urges producers of Electrical and Electronic Equipment (EEE) to provide information on how these products can be treated, reused or recycled.

In order to comply with this directive in the European Union, Seating Matters electrical components are marked with a crossed out wheellie bin. This indicates that the electrical components should be treated in accordance with the WEEE regulations after their useful life.

Advice on Recycling

- ① Your Seating Matters chair may contain batteries which should not be disposed of in household waste.
- ② Never dispose of the battery in a fire. This may cause an explosion.
- ③ The chair may contain substances that could be harmful to the environment.
- ④ Electrical components must be taken to a proper recycling facility.
- ⑤ Your Seating Matters chair contains component parts which can be recycled.
- ⑥ We thank you for being environmentally responsible and for making efforts to recycle your Seating Matters chair at the end of its' safe and useful life.
- ⑦ Contact your local authority or governmental agency for the regulations that apply in your area.
- ⑧ If you wish to have Seating Matters recycle your chair on your behalf, you are welcome to return the product to our company.



Plastic Components

Many of our plastic components are made from polypropylene and can be recycled as long as they are recycled with other polypropylene resin materials. Polypropylene sheets can be recycled with any other materials that have this symbol.



Plastic Trays

Our plastic tray tables are made from Polyethylene Terephthalate Glycol (PETG) which is a sturdy, transparent, easily cleaned material. Like acrylic, PETG is 100% recyclable and can be recycled and re-purposed indefinitely. Capable of being sterilized, it's a renowned food-safe material and will help us meet a higher standard towards infection prevention & control. PETG's damage resistance is far higher than that of acrylic & has an impact resistance 30 times that of glass. PETG can be recycled with any other materials that have this symbol.



Safety

The **Sorrento Bariatric™** is CE marked to show conformance to the Medical Devices Directive 93/42/EEC and conforms to BS ISO 7176 at medium hazard.

Regional Variations

The device referred to as a "**Sorrento Bariatric™**" is a Seating Matters product category and the information included in this document reflects common features of this group of products. In some regions of the world, we supply product design variations of equivalent function and ease-of-use but with alternative specifications or reinforcements.

Warranty

The following table outlines the parts covered under frame warranty and the warranty period specific to your chair;

Chair	Frame Warranty Period	Frame Parts Covered
Phoenix & Sorrento	7 Years	(a) Metal base frame.
Phoenix Petite & Sorrento Petite		(b) Metal seat frame.
Sorrento Bariatric		(c) Metal back rest frame.
Atlanta		(d) Armrest brackets.
Monaco		(e) Cracks or tears in metal work.
Atlanta 2		(f) Leg rest linkages.
Phoenix 2 & Sorrento 2	3 Years	(g) All mounting points for gas struts and electric actuators.
Milano		(h) All metal fixings and hinges.
Sydney GoFlat		(i) All welds on chair frame.
Orlando Range	1 Year	

The following table outlines the parts covered under components warranty;

Chair	Component Warranty Period	Components Covered
Phoenix & Sorrento	1 Year	(a) Actuator systems including control box, handset and charger/charger lead.
Phoenix Petite & Sorrento Petite		(b) Gas struts including release cables and component parts.
Sorrento Bariatric		(c) Upholstery if there is a clear and obvious manufacturing error.
Atlanta		(d) Castors.
Monaco		(e) Wing knobs and adjustment handles.
Atlanta 2		(f) Bolts and attachment fixings.
Phoenix 2 & Sorrento 2		
Milano		
Sydney GoFlat		
Orlando Range		

For full terms and conditions visit our website or scan the QR code here:



Intellectual Property

Seating Matters are at the forefront of seating research and design, therefore we take the protection of our intellectual property very seriously and have our designs, patents and trademarks protected in many jurisdictions throughout the world.

The Seating Matters Trademark is registered throughout the European Union and various countries globally.

Patent Pending	No. GB1915470.7 No. GB2207271.4
----------------	------------------------------------

US Design Patent	No. 601360S No. D611718 No. 600932 No. D602704S
------------------	--

Australian Design Registration	No. 325536 No. 324011 No. 325537 No. 324012
-----------------------------------	--

Community Design Registration	No. 001016364-002 No. 000942180-0004 No. 002428813-0001 No. 001016364-001 No. 012673018
----------------------------------	---

Canadian Design Registration	No. 130224 No. 128763 No. 130217 No. 128764
---------------------------------	--

We are here to help

For any questions or queries regarding your Seating Matters chair please contact:
contact@seatingmatters.com

Notes

Notes



UK, Europe & N.America

131 Carnamuff Road

Limavady

Northern Ireland

BT49 9JG

T: +44 (0) 28 777 666 24

contact@seatingmatters.com

Australia

9/256 New Line Road

Dural

NSW 2158

Australia

T: +61 1300 001 050

info@seatingmatters.com.au